paco jaansōn
bathroom innovations

360

AD33917
Progressive Wall Mixer with Spout

Progressive Cartridge Technology

Progressive cartridge technology, allows accurate temperature and flow control in one simple rotation of the low profile handle.

Modern flow controlled spout and showers operate best at full pressure. Turning the handle clockwise starts cold water flow increasing the rate at a quarter turn. Continuing to turn introduces warmer water until full hot water flow is reached at half turn.

This wall mixer has been built from the best available materials and has been manufactured to the highest Australian and overseas standards.

Your wall mixer set is guaranteed by the manufacturer for 15 years on parts only, 7 years cartridge only and 1 year labour. Failure to comply with these installation instructions will void this warranty.

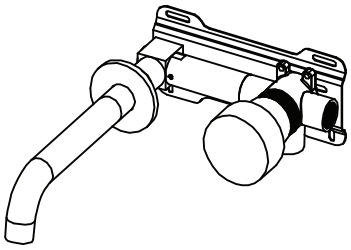

IMPORTANT

This product must be installed by a licensed plumber in order for its optimal operation and for coverage of manufacturer's warranty

All dimensions are in millimetres and are subject to normal manufacturing variations.

Paco Jaanson reserves the right to vary the specifications at any time without notice.

Pressure & Temperature Required

Hot and cold water inlet pressures should be equal.
Inlet pressure range: 150-600kpa.
New regulation: 500kpa maximum operating pressure at any outlet within a building.

General Information Requirements

Note that the use of filters before hot and cold inlets is recommended in geographic areas with hard water (mineral salts, sand & other such impurities).

All mixers are designed for mains pressure, equal for both hot and cold water. ALL PIPES SHOULD BE FLUSHED OUT BEFORE INSTALLING THE MIXER.

Maintenance

Should service be required on your wall mixer set, please contact your distributor.

Cleaning Suggestions

Use only clean soap and water with a soft sponge or cloth. DO NOT USE ANY DETERGENTS OR CREAM CLEANERS. The aerator screwed into the end of the water outlets of the basin and sink mixers should be regularly checked and cleaned by removing and brushing.

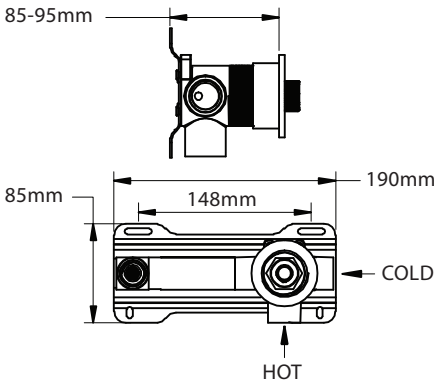

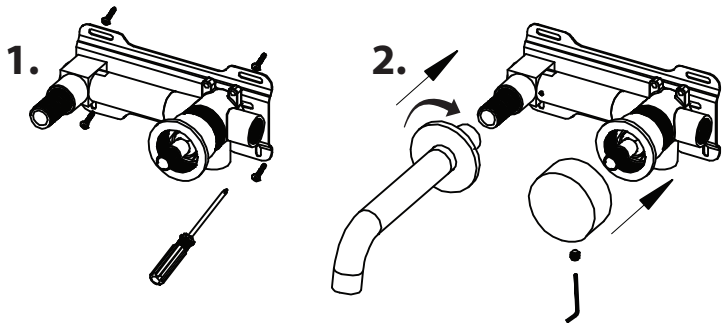

NOTE: For Shower and Diverter Style Mixers Only

1. **Once the mixer is plumbed in and the wall sheeting (tiles) installed, the gap around the mixer body must be properly filled with silicon to prevent wall suface penetrating behind the face plate into the wall cavity.**
2. **Keep plastic protective cover over the mixer body and diverter arm until all wall work (tiling, grouting) is complete.**
3. **Diverter mixer includes a chrome adaptor for water supply to bath (1/2" female BSP). Installing plumber must correctly seal the adaptor connections using tape and paste.**

PROGRESSIVE CARTRIDGE

15 YEAR WARRANTY

WATER RATING 5 litres per minute

Notice to Installers

Please leave this sheet with the facility manager after completing the installation.
This document contains information necessary for routine maintenance and servicing.

Copyrights

© 2008 PacoJaanson. All rights reserved. The information in this manual is subject to change without notice.

PACO JAANSON FINE BATHROOMS
Telephone :1800 006 260
www.pacojaanson.com.au

In2change0PJ05201906