

Installation Guide

La Douche Wall Arm with Swivel Shower Head Set
Hi-852


paco jaanson

IMPORTANT INFORMATION

- Operating static pressure is 150-500kpa. If pressure exceeds this, then an approved pressure limiting valve must be fitted.
New Regulation : -500kpa maximum static pressure at any outlet within a building. (Ref. AS/NZS 3500.1)
- Shower is fitted with flow regulator. This lower flow rate may not be suitable for connection to some gravity fed Water Heaters, low pressure supply networks, Instantaneous Water Heaters, Tempering Valves, Solar Water Heaters & Thermostatic Mixing Valves. Check with the manufacturers of these products.
NOTE : Warranty is void if flow regulator is not installed as shown.
- Not suitable for gravity feed systems.
- All pipework must be thoroughly flushed prior to installation, as foreign materials may block the flow regulating device and reduce the flow of water.
- Where shower incorporate flow regulator, care shall be exercised during installation to ensure that the male connecting thread do not damage the flow regulator.
- To be installed in accordance with AS/NZS 3500.
- Maximum hot water temperature : 70 °C

Maintenance and Care

- Using a soft cloth with a mild detergent or soap is all that is required to clean surfaces.
- Do not use abrasive cream cleaners or citrus based cleaning products. These will damage the surface.

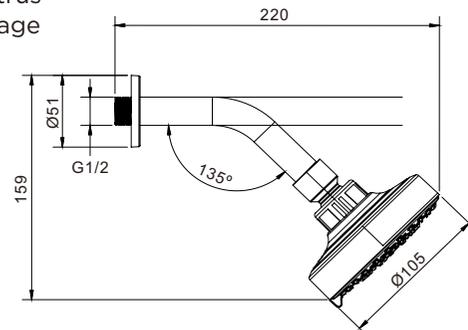

Installation

- 1 - Apply thread tape to the outlet nipple, screw the shower arm onto nipple.
- 2 - Check the O ring is fixed and screw the showerhead onto shower arm.
- 3 - Turn water on to unit and test for leaks.

